



| Single Specification             |                 |                                                              |
|----------------------------------|-----------------|--------------------------------------------------------------|
| Product Name                     |                 | Sealed Nickel Metal Hydride Cylindrical Rechargeable Battery |
| Model                            |                 | <b>EJH-AAA650</b>                                            |
| Nominal Voltage                  |                 | 1.2V                                                         |
| Nominal Capacity                 |                 | 650mAh                                                       |
| Dimension<br>(with tube)         | Diameter        | 10.5 <sup>+0</sup> <sub>-0.7</sub>                           |
|                                  | Height          | 44.5 <sup>+0</sup> <sub>-1.0</sub>                           |
| Internal Resistance<br>at 1000Hz |                 | ≤ 40mΩ<br>(After charge)                                     |
| Charge                           | Standard        | 65mA × 16h                                                   |
|                                  | Rapid           | 325mA × 2.5h                                                 |
|                                  | Trickle         | 19.5~32.5mA                                                  |
| Discharge Cut-off Voltage        |                 | 1.0V                                                         |
| Cycle Life                       |                 | ≥ 500 Cycles                                                 |
| Ambient<br>Temperature           | Standard Charge | 0°C to 45°C                                                  |
|                                  | Rapid Charge    | 10°C to 40°C                                                 |
|                                  | Trickle Charge  | 0°C to 45°C                                                  |
|                                  | Discharge       | -20°C to 50°C                                                |
|                                  | Storage         | -20°C to 45°C                                                |
| Ambient Humidity                 |                 | 65±20%                                                       |

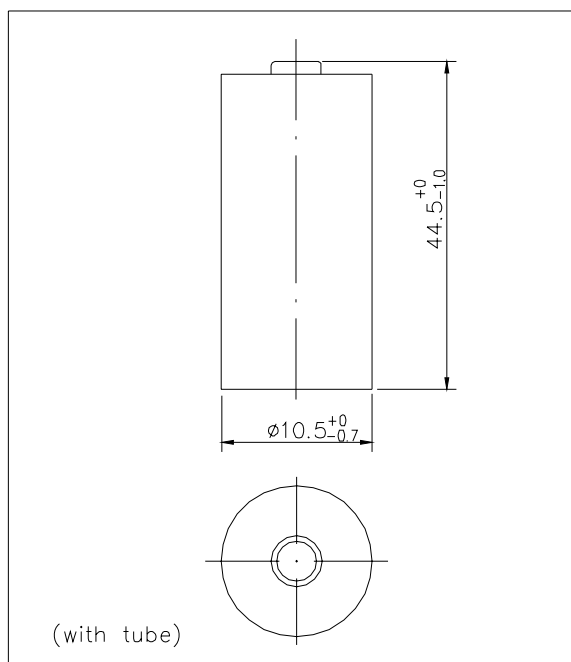


## General Characteristics

Standard charge

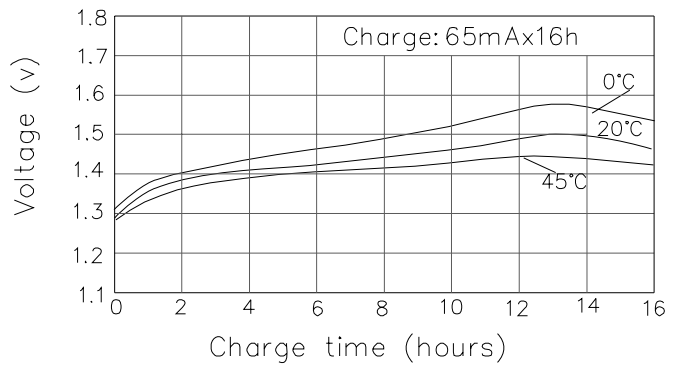

Rapid charge

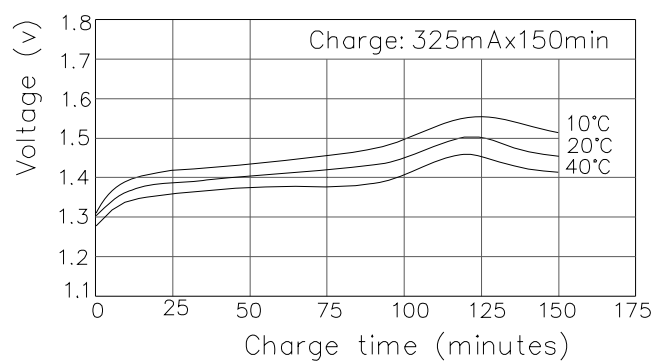

Discharge

