




Dimension:unit(mm)

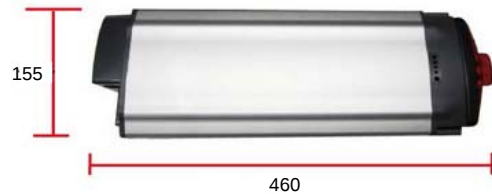

| Model No.   | Configuration              | Voltage | Capacity | Nominal Rate | Charger Voltage Limit | Charger Current Limit | Approx Weight |
|-------------|----------------------------|---------|----------|--------------|-----------------------|-----------------------|---------------|
| EJCA24V-04A | Panasonic CGR18650CG -7S4P | 24V     | 9.0Ah    | 216Wh        | 42V                   | 3A                    | 2.80Kg        |
| EJCA24V-04B | Panasonic NCR18650-7S4P    | 24V     | 11.6Ah   | 278Wh        | 42V                   | 3A                    | 2.80Kg        |
| EJCA24V-04C | Samsung ICR18650-22F-7S4P  | 24V     | 8.8Ah    | 211Wh        | 42V                   | 3A                    | 2.80Kg        |
| EJCA24V-04D | Samsung ICR18650-26F -7S4P | 24V     | 10.4Ah   | 250Wh        | 42V                   | 3A                    | 2.80Kg        |
| EJCA24V-04E | Panasonic CGR18650CH -7S4P | 24V     | 8.8Ah    | 211Wh        | 42V                   | 5A                    | 2.80Kg        |
| EJCA24V-04F | Samsung ICR18650-22P -7S4P | 24V     | 8.4Ah    | 201Wh        | 42V                   | 5A                    | 2.80Kg        |

### ● Cycle Life

Standard charge mode, keep for 30min;Standard discharge mode:>500cycle,70%

### ● Standard Charge Model

Charge to 42V with constant current ,then charge with constant voltage till current less than 300mA.

Use special charger:CC+CV,2A,42V/300mA

### ● Options

Standard BMS: overcharge protection, overdischarge protection ,overcurrent protection balance&high temperature protection

Smart BMS,Standard BMS functions,scale,communication,sleep,encode,tailights blinking,5V USB output

### ● Certificate

FCC,CE,MSDS