



Basic Specifications		
Product Name		Lithium Manganese Dioxide(Li-MnO ₂) Battery
Model		CR123A
Nominal voltage		3.0V
Capacity	Nominal	1300 mAh
	Minimum	1200 mAh
Discharge Cut-off Voltage		2.0V
Max constant discharge current		1500mA
Max. pulse current		3000mA
Operating Temperature		-40~ +60°C
Storage Temperature		-10~ +40°C
Relative humidity		65±20%
Period of Validity		5 year
Dimensions	Diameter	11.5 mm
	Height	10.5 mm
Weight(Approximately)		10g


Discharge performance @ 25°C

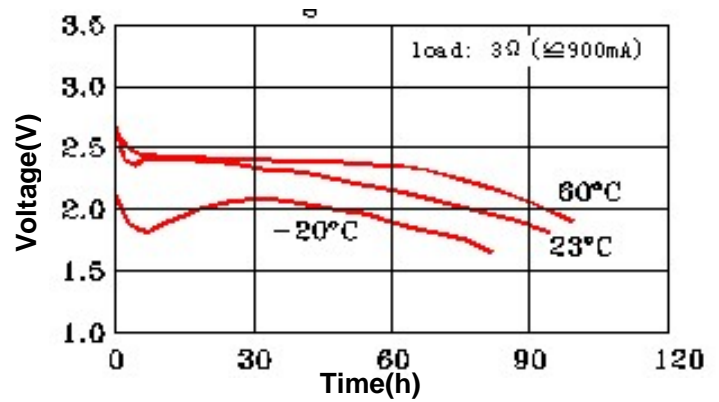


Discharge Characteristics On Temperature

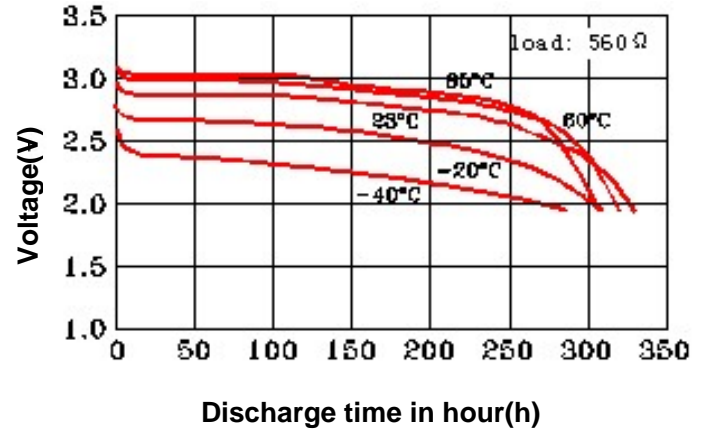

Dimensions : (Unit: mm)

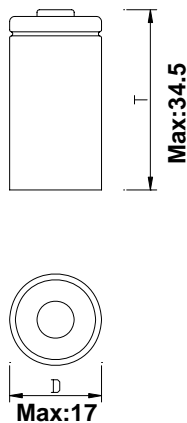

Plus Discharge Characteristics

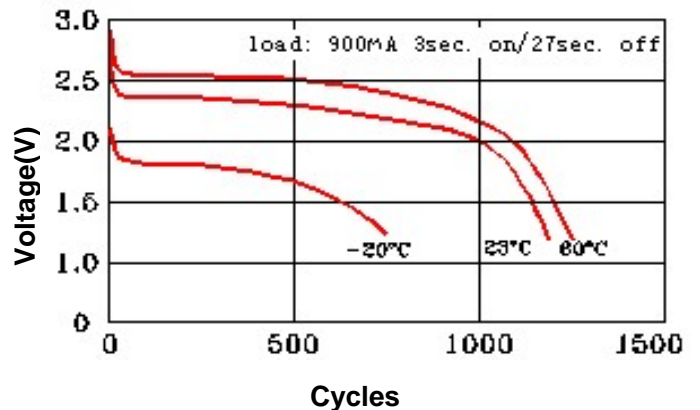

WARNING:

- Do not recharge, short circuit, crush, disassemble, heat above 100°C incinerate.
- Do not place the battery in heater, washer or high-pressure container.
- Stop using when the battery become heat, emit smell or appear other abnormality during use or storing.

Manufacturer reserves the right to alter or amend the approval sheet without the prior notice