


Basic Specifications

Nominal Capacity	20Ah(0.2C ,1.5V discharge)	
Nominal Voltage	2.4V	
Charge Voltage	2.75V±0.05V	
Cell Weight	713g (Max)	
Internal Impedance	≤1 mΩ	
Charging Mode	Constant Current/Constant Voltage	
Discharge Cut-off Voltage	1.6V	
Charge Current	0.1~10C	
Discharge Current	0.1~10C	
Cycle Life(>90% of capacity)	Over 10000 cycles (1C Continual Charge and Discharge at 25°C,100%DOD)	
Operating Temperature	Charging	-10 °C ~60 °C
	Discharging	-30 °C ~60 °C
Storage Temperature	-10 °C ~45 °C	
Dimension	Length	210mm
	Width	108mm
	Thickness	12.7mm



Characteristics curves

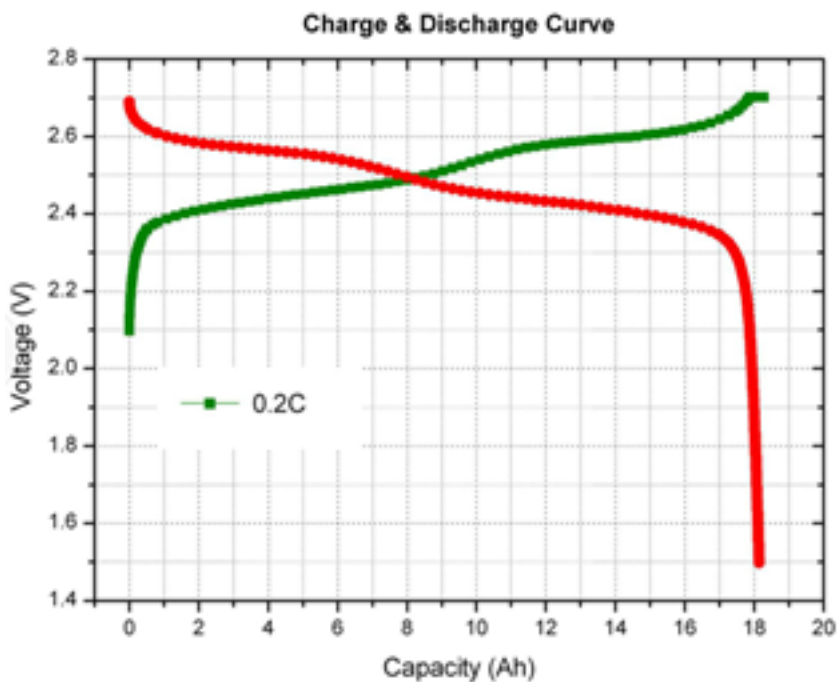

Manufacturer reserves the right to alter or amend the approval sheet without the prior notice